

INDIRECT WATER HEATERS

H₂O SINGLE COIL



STAINLESS STEEL

- Easy to install
- All connections on top
- Low pressure drop
- Magnesium anode rod
- Smooth stainless steel coil
- Welded stainless steel cold water dip tube (factory installed)
- Minimal standby losses
- Limited Lifetime Residential Warranty (5-Year Commercial)
- Stainless steel aquastat well, T & P and drain valve (factory installed)
- Aquastat control shipped loose

FULL STAINLESS STEEL OFFERING

Utica Boilers offers a complete line of Stainless Steel Single and Dual Coil Indirect Water Heaters, Storage Tanks, Buffer and Solar Tanks.


Visit us at www.utica boilers.com for more information




PRODUCT SPECIFICATIONS




STANDARD & HO UNITS

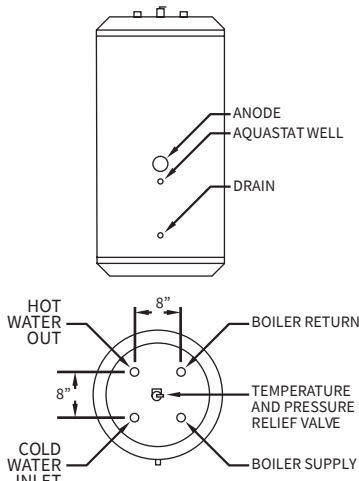

HOC UNITS

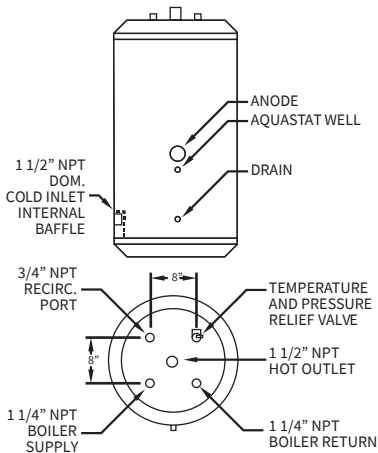

XHOC UNITS

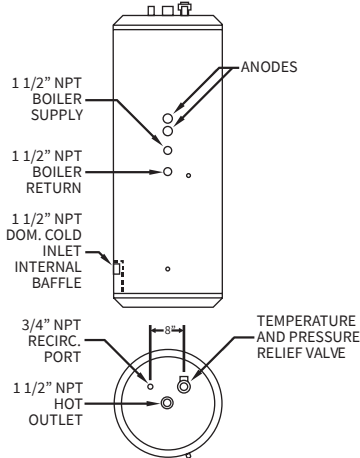

Model	Storage	Coil	Dimensions			Piping NPT	
	Capacity (Gallons)	Heating Surface (Square Feet)	Height (Inches)	Diameter (Inches)	Weight (lb)	DHW In/Out (Inches)	Boiler Water In/Out (Inches)
H2OI30UB	30	7.3	34.0	23.5	85	3/4	1
H2OI40UB	40	7.7	44.0	23.5	100	3/4	1
H2OI40LUB	42	7.4	36.0	28.0	100	3/4	1
H2OI50UB	50	8.2	54.0	23.5	110	3/4	1
H2OI60UB	60	8.6	62.0	23.5	125	3/4	1
H2OI60LUB	60	7.7	46.0	28.0	120	3/4	1
H2OI80UB	80	8.2	56.0	28.0	140	1	1
H2OI115DK	115	9.1	74.0	28.0	175	1	1

HIGH OUTPUT UNITS

H2OI60HOUB	60	15.1	62.0	23.5	145	1	1
H2OI80HOUB	80	14.8	56.0	28.0	155	1	1
H2OI80HOCUB	80	14.8	56.0	28.0	155	1-1/2	1-1/4
H2OI115HOUB	115	15.6	74.0	28.0	190	1	1
H2OI115HOCUB	115	15.6	74.0	28.0	190	1-1/2	1-1/4

EXTRA HIGH OUTPUT UNITS 85-XHO AND 115-XHO

H2OI85XHOCUB	87	28.7	64.0	28.0	215	1-1/2	1-1/2
H2OI115XHOCUB	115	28.7	74.0	28.0	240	1-1/2	1-1/2

NOTE: Max. Tank Working Pressure 150 psi all models. Max. Coil Working Pressure 90 psi all models.

Options	(L) Low profile models for applications with low clearances.
	(HO) High Output models available to meet greater demand.
	(HOC) High Output Commercial models with larger tappings for higher flow rates.
	(XHO) Extra High Output models.

Model	Max First Hour Rating GPH @		Continuous Rating GPH @		Output Needed	Water Flow Through Coil	Pressure Drop Through Coil
	140°F	115°F	140°F	115°F	Btu/h	GPM	FT Water
H2OI30UB	202	269	175	242	131,000	14	5.6
H2OI40UB	221	292	185	256	139,000	14	5.9
H2OI40LUB	212	251	176	215	132,000	14	5.6
H2OI50UB	223	291	178	246	133,000	14	6.2
H2OI60UB	262	342	208	288	156,000	14	6.4
H2OI60LUB	239	310	185	256	139,000	14	5.9
H2OI80UB	271	348	348	276	149,000	14	6.2
H2OI115UB	324	409	221	306	166,000	14	6.7

HIGH OUTPUT UNITS

H2OI60HOUB	406	541	352	478	264,000	14	10.5
H2OI80HOUB	418	551	346	479	259,000	14	10.3
H2OI80HOCUB	442	584	370	512	277,000	21	15.8
H2OI115HOUB	467	607	364	504	273,000	14	10.8
H2OI115HOCUB	479	623	376	520	282,000	21	16.7

EXTRA HIGH OUTPUT UNITS 85-XHO AND 115-XHO

H2OI85XHOCUB	738	992	660	914	495,000	28	13
H2OI115XHOCUB	763	1017	660	914	495,000	28	13

NOTE: All ratings are based on 200°F boiler water supply and 50°F cold water inlet.



ECR International, Inc. 2201 Dwyer Avenue, Utica, NY 13501
Tel. 800 253 7900
www.ecrinternational.com



Conforms to UL STD 174
Certified to CAN/CSA STD C22.2 No. 110-94



All specifications subject to change without notice.
©2021 ECR International, Inc.
PN 240009215 Rev. [05/12/21]